


Technical Specifications

HP E24 G4 FHD Monitor

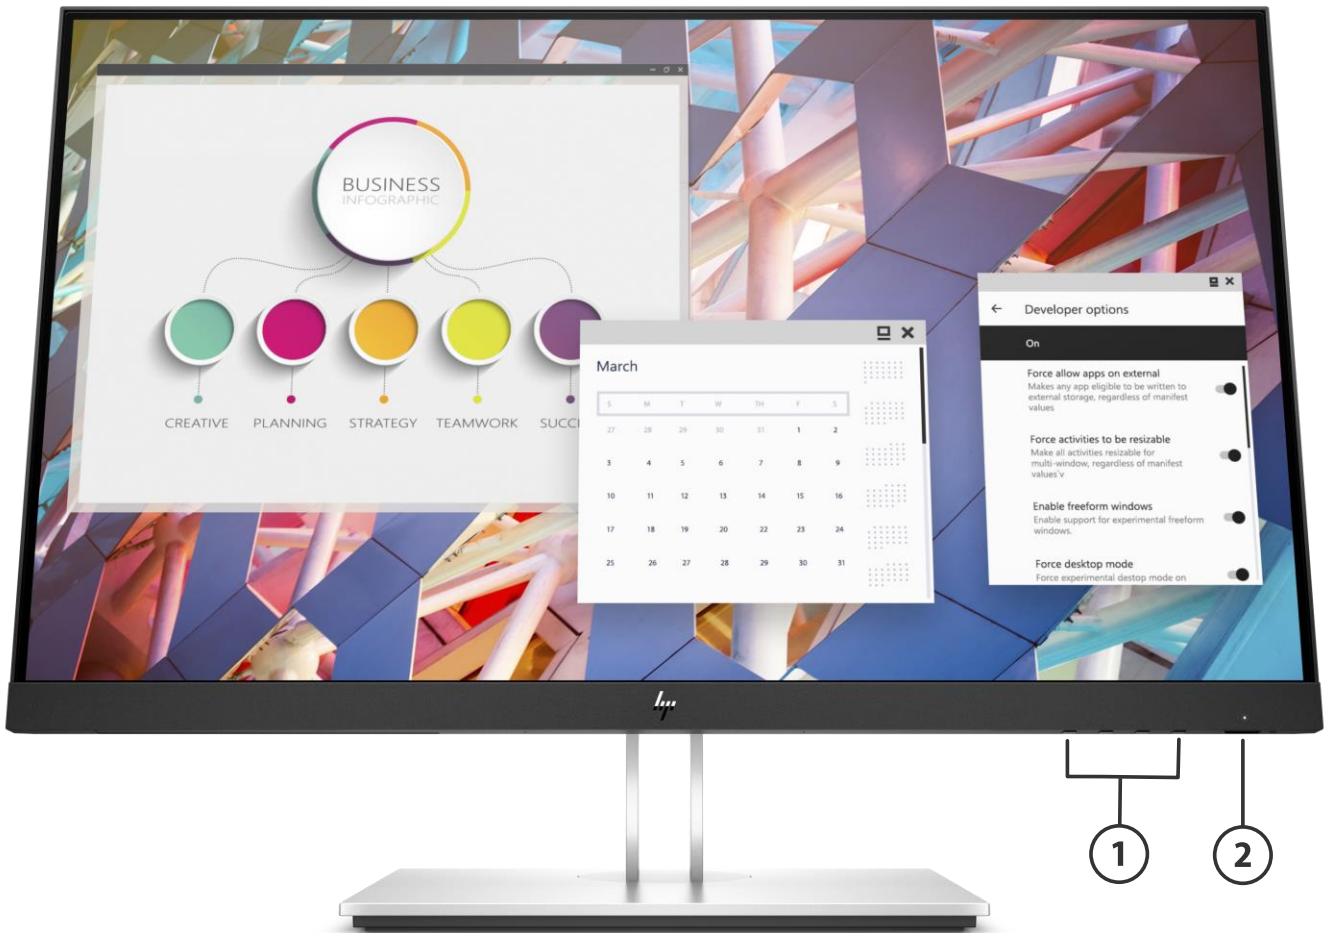


Front

1. OSD Buttons

2. Power Button

Technical Specifications

HP E24 G4 FHD Monitor

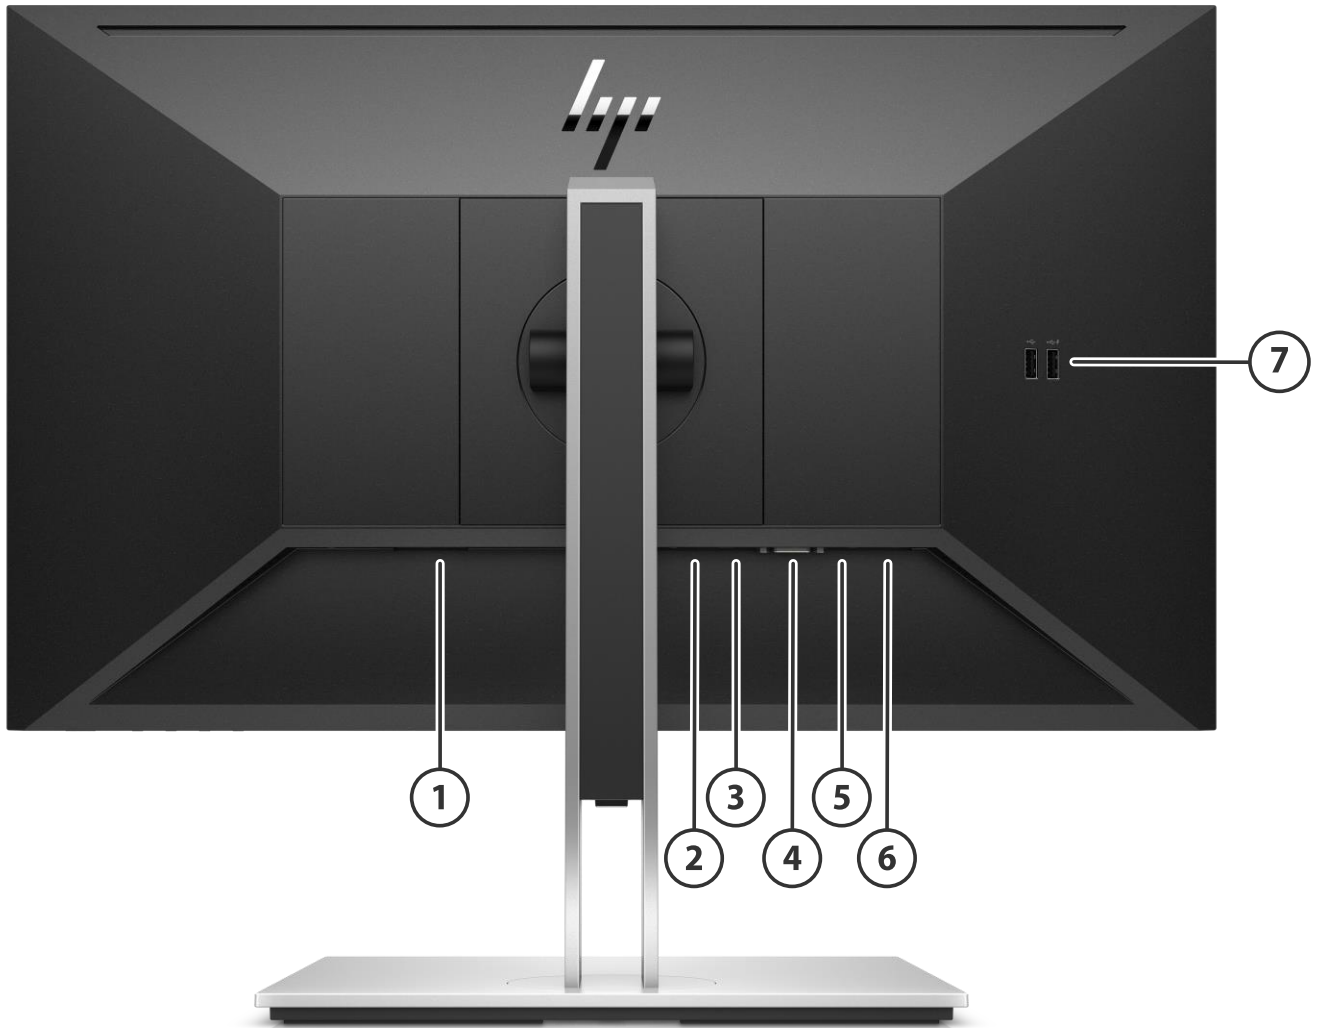

1. Power Connector
2. DisplayPort™
3. HDMI Port
4. VGA Port

Back

5. USB-B Port
6. USB-A Ports (2)
7. USB-A Ports (2)

Technical Specifications

Models: 9VF99AA

Panel Specifications	Display Size (Diagonal)	23.8-in
	Display Panel Type	IPS
	Micro-Edge Bezel	Yes, 3-sided
	Native Resolution/Timing	1920 x 1080 @60Hz
	Panel Bit Depth	8bit (6bit + FRC)
	Aspect Ratio	16:9
	Brightness - Typical	250 cd/m ²
	Static Contrast Ratio - Typical	1000:1
	Static Contrast Ratio - Minimum	700:1
	Dynamic Contrast Ratio (DCR)	5M:1
	Flicker Free	Yes
	Pixel Pitch	0.2745 (H) × 0.2745(V)
	Pixels Per Inch (PPI)	92.5
	Backlight Lamp Life (to half brightness - in hours)	30k minimum
	Anti-Glare Panel	Yes
	Response Time - Typical	5ms GtG (with overdrive)
	Horizontal Viewing Angle (typical CR>10)	178°
	Vertical Viewing Angle (typical CR>10)	178°
	Panel Active Area (w x h)	527.04(H) × 296.46(V) mm
	Preset Graphic Modes/Supported Resolutions	640 × 480 @60Hz 720 × 400 @70Hz 800 × 600 @60Hz 1024 × 768 @60Hz 1280 × 720 @60Hz 1280 x 800 @60 HZ 1280 × 1024@60Hz 1440 × 900 @60Hz 1600 × 900 @60Hz 1680 × 1050 @60Hz 1920 × 1080 @60Hz
	Maximum Resolution	1920 × 1080 @60Hz
	Recommended Resolution	1920 × 1080 @60Hz
	Vertical Scan Range	50-60Hz
	Horizontal Scan Range	30-80kHz
	Default Color Temperature	Neutral (6500K)
	Maximum Pixel Clock Speed	170MHz

NOTE: Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Color Gamut Coverage NTSC 72%

Color Management **Color Space / Subsampling Support** RGB 4:4:4, YCBCR 4:4:4, YCBCR 4:2:2

Technical Specifications

	Default Color Temperature	Neutral (6500 K)
	Low Blue Light Modes	Yes, HP Eye Ease (TÜV Low Blue Light Hardware Solution certified)
	RGB Channel Adjust	Yes
	Factory Color Calibrated	Yes (Color Temperature)
	Factory Color Presets	Warm - 5000K, Neutral - 6500K, Cool - 9300K
Monitor Specifications	Exterior Color of Monitor Bezel and Stand	Black head, Silver stand
	Plug & Play	Yes
	Tilt	-5° to +23°
	Swivel	+/-45°
	Pivot	+/-90°
	Height Adjustment Range	150mm
	VESA Mounting	100mm x 100mm
	Security Lock Ready	Yes
	Detachable Base	Yes, ships detached
	Warranty	Based on region
On Screen Display (OSD)	On Screen Display User Controls	Brightness+, Color, Image, Input, Power, Menu, Management, Information
	Monitor Control Buttons or Switches	Menu, Minus ("-")/Information, Plus ("+") /Viewing Mode, OK/Next Active Input, Power
	User-Assignable Function Buttons	Yes, 3 (6 Options)
	Languages	10 (German, Dutch, T-Chinese and S-Chinese, English, Spanish, French, Italian, Japanese, Portuguese)
Connector Types	DisplayPort™	1 DisplayPort™ 1.2 in
	HDMI	1 HDMI1.4
	VGA	1
	HDCP support	Yes, (DisplayPort™ and HDMI)
USB Port Specifications	USB Version	3.2
	USB Hub	Yes
	Downstream Ports	4 Ports
	Upstream Ports	1 USB-B port
	Fast Charging USB Ports	1 Port (Side) (USB-A)
	Power Output Maximum	Fast Charging: 7.5 W
Special Features	User Presets	Yes
	User Updateable Firmware	Yes
Power & Operating Specs	Power Supply	Internal
	Power Source	100 – 240 VAC 50/60 Hz
	Power Consumption - Maximum	51 W

Technical Specifications

	Energy Saving/Standby Mode	0.5 W
	Power Consumption - Typical	26 W
	Power cable length	1.9 m
EU Energy Efficiency Class (ERP lot-5)	On-mode Power Consumption	14 W
	Annual Power Consumption	26 kWh
	Energy Efficiency Class	D
	Visible Screen Size	23.8" / 60,5 cm Diagonal
Operating Conditions	Operating Temperature - Celsius	5° – 35°C
	Operating Temperature - Fahrenheit	41°C – 95°F
	Non-operating Temperature - Celsius	–34° – 60°C
	Non-operating Temperature - Fahrenheit	–29° – 140°F
	Operating Humidity	20 – 80% Relative Humidity (non-condensing)
	Non-operating Humidity	5 – 95%
	Operating Altitude	0 – 5,000 m (16,400 ft.)
	Non-operating Altitude	0 – 12,192 m (40,000 ft.)
Environmental Features and Certifications	Mercury-free LED display backlighting	Yes, Mercury-free LED backlighting
	Arsenic-Free Display Glass	Yes
	Low Halogen*	Yes GSE HP-00011-01B, table 2 defines low-halogen (BFR, CFR, PVC)
	Agency Approvals and Certifications	WW application CE, CB, KC/KCC/NOM/ISO 9241-307/ EAC/TUV-GS/cTUVus/PSB/CCC/CEL/ISC/VCCI/FCC/BSMI/Vietnam MEPS/Australian-New Zealand MEPS/WEEE/BIS/CEC/E- Standby/Low Blue Light/CECP/TUV-S/CECP
	Microsoft WHQL Certification	Win 10, Win 8, Win 7
	ENERGY STAR®	Yes, ENERGY STAR® 8
	EPEAT® Registered*	Yes
	TCO Certified	Yes
	China Energy Label	CEL Grade 1
	SmartWay Transport Partnership - NA only	Yes (NA SKU)

*External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

NOTE: DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

Contains Recycled Plastics 85% recycled content by total weight

Technical Specifications

Unit Product/Package Specifications	Product Dimensions (Unpacked with stand) (W x D x H)	53.94 x 20.7 x 49.49 cm	21.24 x 8.15 x 19.48 in	
	Product Dimensions (Version 1) (Packed) (W x D x H)	61.1 x 22.3 x 39.2 cm	24.06 x 8.78 x 15.43 in	
	Product Dimensions (Version 2) (Packed) (W x D x H)	61.8 x 18.8 x 38.7 cm	24.33 x 7.4 x 15.24 in	
	Display Head Dimensions (Unpacked without stand) (W x D x H)	53.94 x 4.7 x 32.33 cm	21.24 x 1.85 x 12.73 in	
	Base Area Footprint (w x d mm)	260 x 207 mm	10.24 x 8.15 in	
	Bezel Measurements	Bottom 19.59 mm (display chin)	Bottom 0.77 in (display chin)	
	Product Weight (Unpacked with stand)	5.7 kg	12.54 lb	
	Product Weight (Version 2021) (Packed)	8.4 kg	18.5 lb	
	Product Weight (Version 2022) (Packed)	8.2kg	18.1lb	
	Product Weight (Head Only)	3.27 kg	7.21 lb	
	Pallet Information (Version 1)	Pallet Dimensions (L x W x H)	1230 x 1150 x 2089 mm	48.43 x 45.28 x 82.24 in
Pallet Total Weight (L x W x H)		40" GQ: 384 kg 40" HQ: 476 kg	40" GQ: 847 lbs 40" HQ: 1050 lbs	
Pallet Layers		GQ: 4 HQ: 5		
Pallet Product per Layer		10		
Total Products per Pallet		50		
Container Load, 20-Foot		460		
Container Load, 40-Foot		960		
Container Load, 40-Foot HighQ		1152		
Pallet Information (Version 2)		Pallet Dimensions (L x W x H)	Slip Sheet: 1250 x 1150 x 2336.2 mm (40' HQ) Pallet: 1250 x 1150 x 2064 mm (40' ft)	Slip Sheet: 49.21 x 45.28 x 91.98 inch (40' HQ) Pallet: 49.21 x 45.28 x 81.26 inch (40' ft)
		Pallet Total Weight (L x W x H)	Slip Sheet: 592 kg (40' HQ) Pallet: 512.5 kg (40' ft)	Slip Sheet: 1305.12 lb (40' HQ) Pallet: 1129.86 lb (40' ft)
	Pallet Layers	6 layers (40' HQ) 5 layers (40' ft)		
	Pallet Product per Layer	12 per layer		
	Total Products per Pallet	72 sets (40'HQ) 60 sets (40' ft)		
	Container Load, 20-Foot	480 sets for pallet or slipsheet		
	Container Load, 40-Foot	1080 sets sets for pallet or slipsheet		
	Container Load, 40-Foot HighQ	1296 sets for pallet or slipsheet		

Technical Specifications

Software Included	HP Display Center	
What's in the box?	1 HDMI	(1.8 m) 5.9 ft
	1 DisplayPort™ (DisplayPort™ 1.2)	(1.8 m) 5.9 ft
	1 Power Cord	(1.9 m) 6.2 ft
	1 USB-B to A cable	(1.8 m) 5.9 ft
	1 QSP	
1 Doc-Kit		
User Guide and Warranty Languages	User Guide Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
	Warranty Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.

Technical Specifications

Copyright © 2022 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.

Summary

Change Log			
January 3, 2021	V1 to V2		Techspecs Updated
February 28, 2021	V2 to V3		Energy Efficiency Class Updated
April 13, 2021	V3 to V4		VESA Mounting Specs
June 28, 2022	V4 to V5		Agency Approvals and Certifications Updated
April 12, 2023	V5 to V6	Updated	Color Management section